# Installation Manual

**NT.1400.03W.SS**

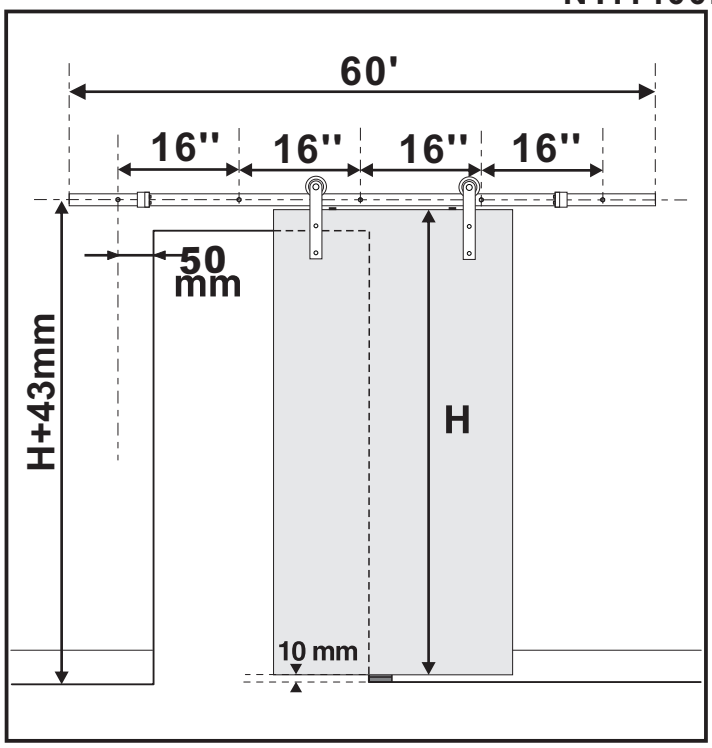


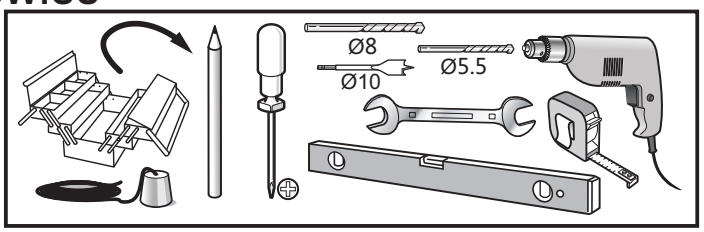


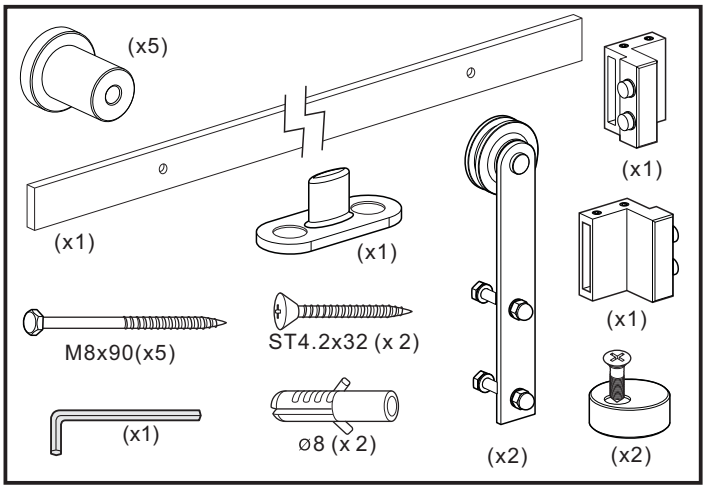


To obtain the maximum weight capacity, all fasteners must be mounted securely into solid wood of studs or blocking within the wall or wood mounted to the face of the wall.

**1**

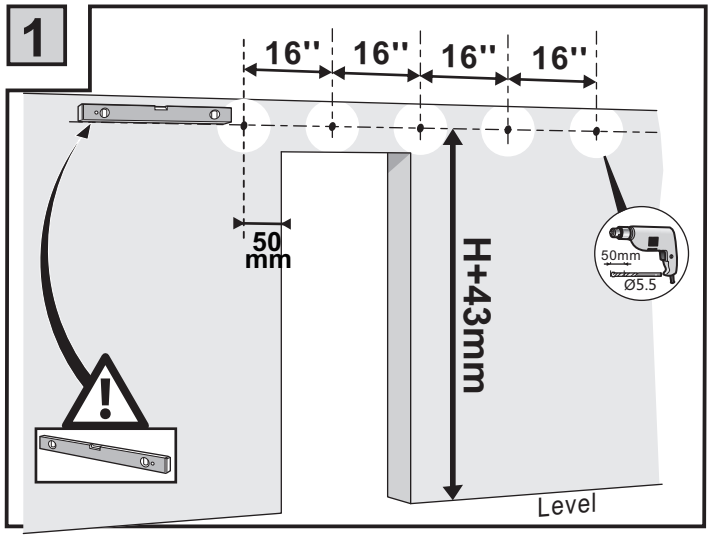


**2**

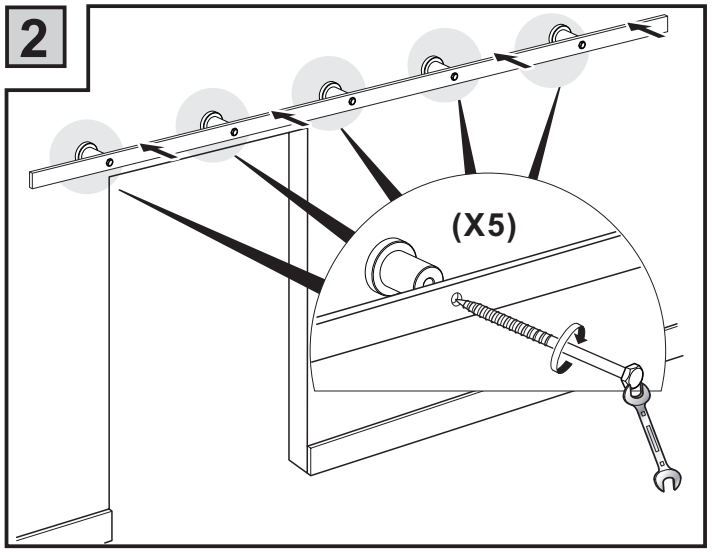


**3**

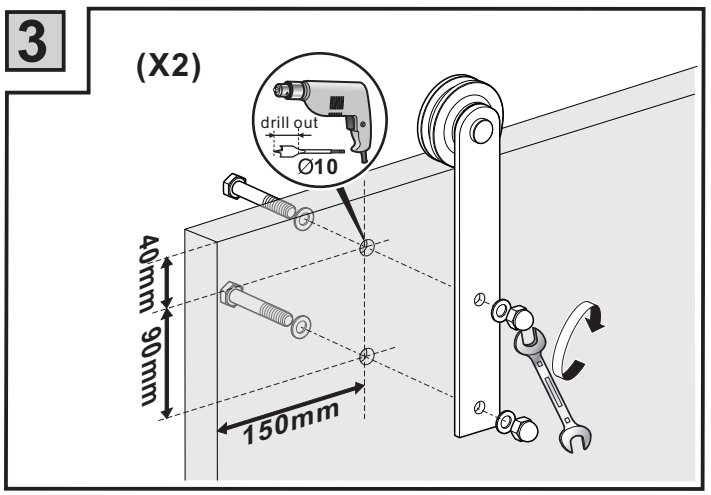


**4**

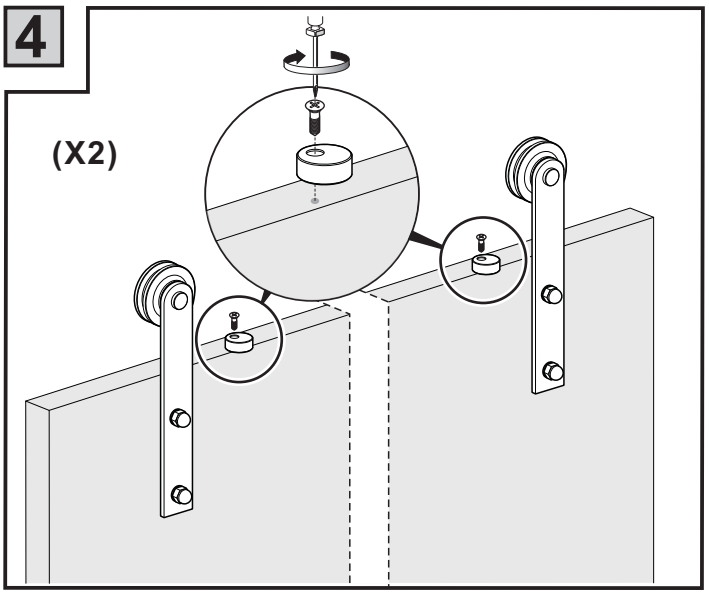

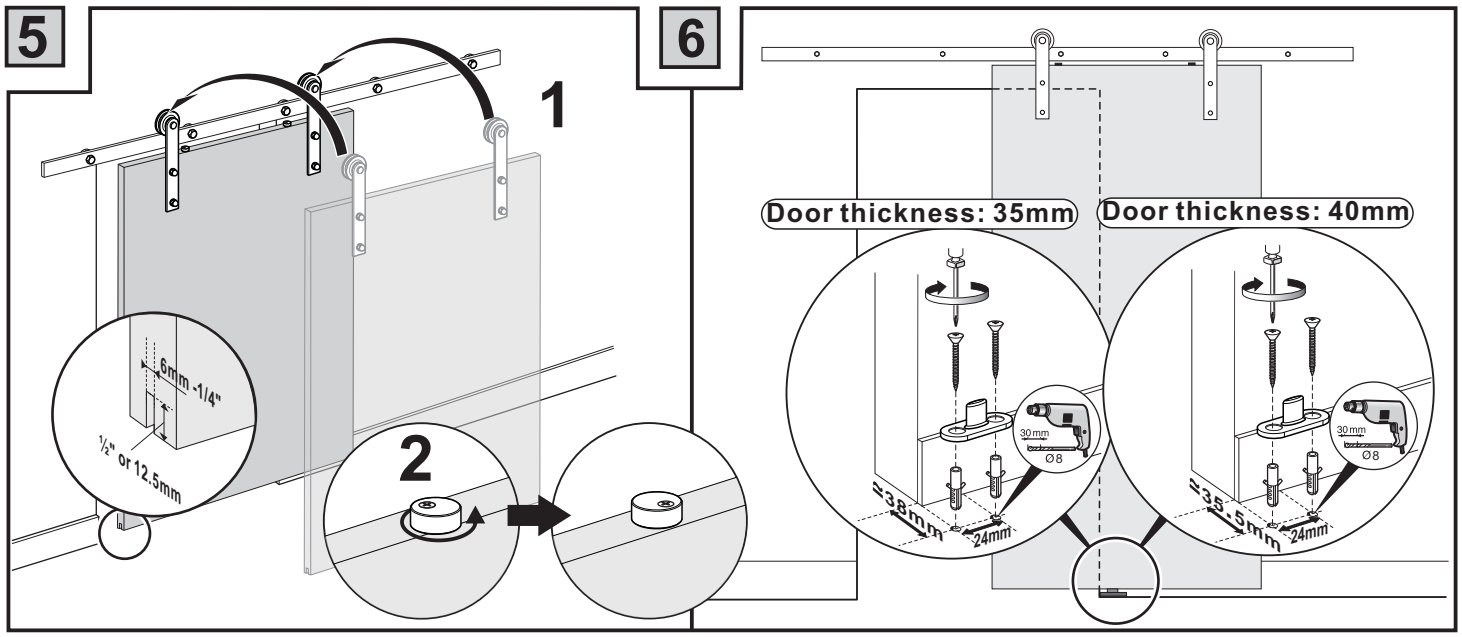
5
1
6mm -1/4"
½" or 12.5mm
2
6
Door thickness: 35mm
Door thickness: 40mm
30 mm
Ø8
≈38mm
24mm
30 mm
Ø8
≈35.5mm
24mm

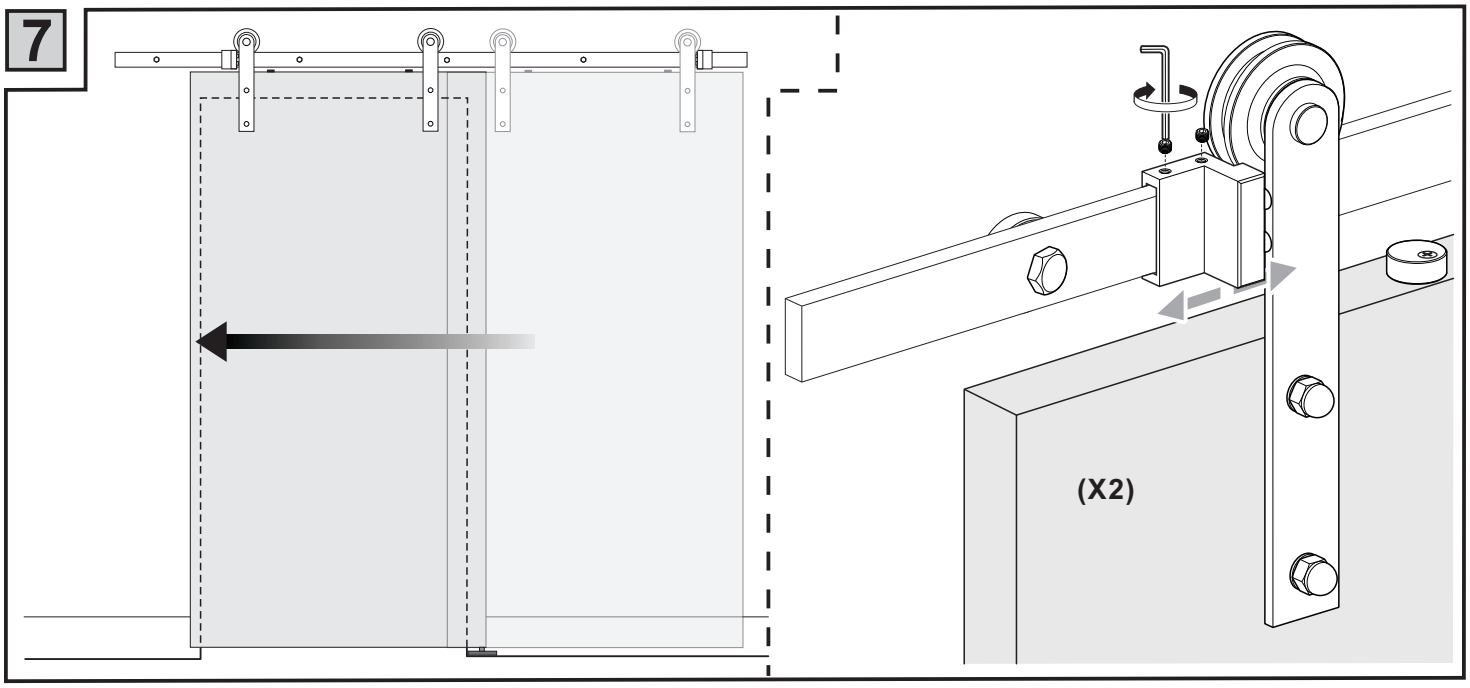
7
(X2)